




Packaged in 3 oz. Tubes Only

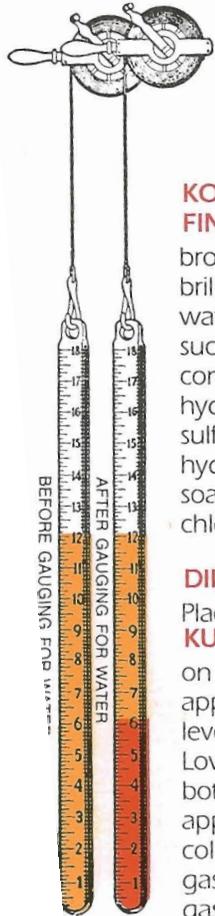


KOLOR KUT WATER FINDING PASTE is golden brown in color and turns brilliant red upon contact with water. This product will successfully gauge water content in all petroleum and hydrocarbons as well as sulfuric acid, nitric acid, hydrochloric acid, ammonia, soap solutions, salt and other chloride solutions.

DIRECTIONS FOR USE
Place a thin film of **KOLOR KUT WATER FINDING PASTE** on a clean gauge line or rod approximately where water level is expected to appear. Lower tape into tank until bottom is reached. Level will appear by positive contrast of colors. Instantaneous in gasoline, diesel, kerosene and gas oils. Heavy oils require a few seconds.



Packaged in 2.25 oz. Plastic Jars Only

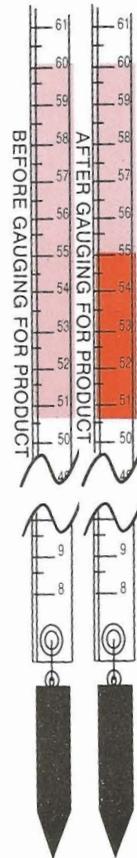

KOLOR KUT GASOLINE GAUGING PASTE is light pink in color and turns red upon contact with gasoline, diesel, naphtha, kerosene, gas oil, crude oil, jet fuels, and other hydrocarbons. A most effective product level indicator.

Store at temperature range of 35° F to 115° F for preservation of product.




CHANNEL SUPPLIES
P.O. BOX 291385
KERRVILLE, TX 78029-1385
830-792-5538 FX 830-792-5543

Kolor Kut® is a
Registered Trademark of Kolor Kut Products Co., Ltd.
Houston, Texas, U.S.A.



Packaged in 2.5 oz. Tubes Only

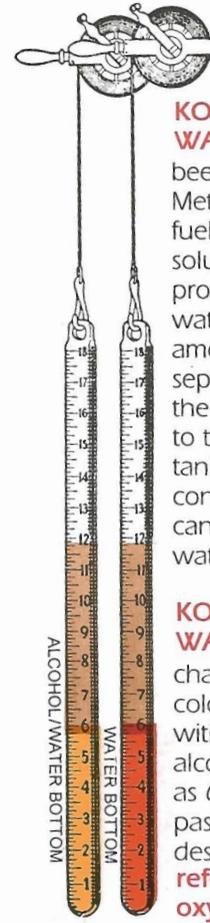

Conforms to
MIL-W-83779

KOLOR KUT MODIFIED WATER FINDING PASTE has been designed for use in Methanol, Ethanol enriched fuel systems. Alcohols are soluble in fuels in all proportions when they are water-free but relatively small amounts of water can cause separation of alcohol from the fuel. The mixture settling to the bottom of the storage tank contains a high concentration of alcohol and cannot be detected by most water detection pastes.

KOLOR KUT MODIFIED WATER FINDING PASTE changes from dark brown in color to bright red on contact with water. Phase separated alcohol solutions with as little as 6% water will turn the paste yellow. This product is designed for use in **reformulated and oxygenated** fuel systems. After testing, it seems that alcohol or deicing agents in fuels have very little effect on the performance of the product.

PRINTED IN USA
ON RECYCLED PAPER
WITH SOY BASED INK